



BTFM-EX

PRESSURATION FANS / Exproof

Fan Components and Material Properties

Cylindrical tube casing, airfoil wing structure and direct coupled motor fans with 3500 m³ / h flow rate of 115000 m³ / h and Ø400 mm -Ø1250 mm 16 models are available in the range options. Body is made of steel with electrostatic powder coating. The motor and fan impeller are connected to the main body by steel carriers. In the case of friction due to the body around the propeller, aluminum sheet is used to prevent sparks. Asynchronous ex-proof motor is used in all models. The motor is out of airflow. It can be manufactured with foot on request.

Fan Structure

Axial wings are produced in pressurized aluminum casting and airfoil structure. The aerodynamically optimized wings provide high efficiency.

Benefits

It works with low noise levels and is designed to be maintenance-free for long periods of time. Speed can be adjusted with speed control devices. The wings are manufactured at the ideal angle and in the form of wings and provide maximum performance.


Speed Control

Optional control devices can be provided. 3~phase products with frequency inverter speed control can be done. (see BSC-F accessory)

Usage Areas

Ex-proof fans are one of the preferred fan types for the ventilation of high-risk environments. It is designed to be non-sparking. Usage areas are determined according to the degree of Atex directive.

Technical Drawing and Tables

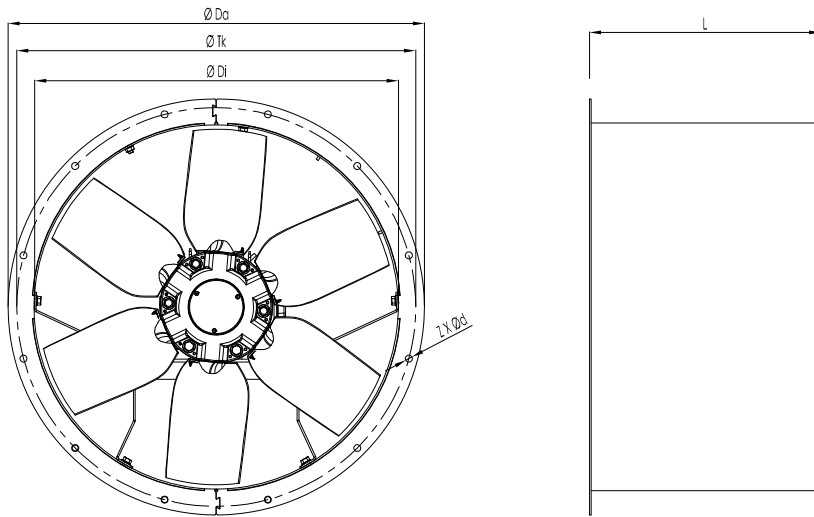

TYPE	ØDi	ØDa	ØTk	ØL	ZXØD
BTFM 400	400	480	450	350	8X12
BTFM 450	450	530	500	350	8X12
BTFM 500	500	590	560	400	12X12
BTFM 560	560	650	620	400	12X12
BTFM 630	630	720	690	400	12X12
BTFM 710	710	800	770	450	16X12
BTFM 800	800	890	860	500	16X12
BTFM 900	900	1005	970	550	16X15
BTFM 1000	1000	1105	1070	700	16X15
BTFM 1250	1250	1390	1320	850	20X15

Dimensions are in (mm)

Accessories



TYPE	VOLTAGE	FREQUENCY	POWER	CURRENT	CAPACITOR	SPEED	AIR FLOW	SOUND PRESSURE	INSULATION CLASS	PROTECTION CLASS
	V	Hz	kW	(A)	(μ F)	r.p.m	m ³ /h	dB(A)	Ins.cl.	IP
BTFM 400-T/6-20/EX	380	50	0,37	1,2	-	1390	3500	60	F	55
BTFM 450-T/6-20/EX	380	50	0,55	1,6	-	1365	4500	62	F	55
BTFM 500-T/6-20/EX	380	50	0,55	1,6	-	1365	7000	66	F	55
BTFM 560-T/6-18/EX	380	50	0,75	2,1	-	1405	10000	63	F	55
BTFM 630-T/6-16/EX	380	50	1,1	2,6	-	1410	14000	70	F	55
BTFM 710-T/6-14/EX	380	50	1,5	3,5	-	1410	17500	71	F	55
BTFM 800-T/6-10/EX	380	50	2,2	5,0	-	1425	23000	74	F	55
BTFM 800-T/6-14/EX	380	50	3	6,6	-	1425	25000	76	F	55
BTFM 900-T/6-12/EX	380	50	4	8,4	-	1440	35000	79	F	55
BTFM 900-T/6-16/EX	380	50	5,5	11,2	-	1465	40000	81	F	55
BTFM 1000-T/6-14/EX	380	50	7,5	15,4	-	1465	50000	84	F	55
BTFM 1000-T/6-20/EX	380	50	11	21,3	-	1465	60000	86	F	55
BTFM 1000-T/6-24/EX	380	50	15	29,4	-	1465	70000	87	F	55
BTFM 1000-T/6-28/EX	380	50	18,5	34,5	-	1470	80000	88	F	55
BTFM 1250-T/6-14/EX	380	50	22	42,5	-	1470	100000	94	F	55
BTFM 1250-T/6-20/EX	380	50	30	55,0	-	1470	115000	94	F	55

Sound Level Measured from 3m distance in room condition.

